


# FI114800 82 lb/hr Deka IX Short


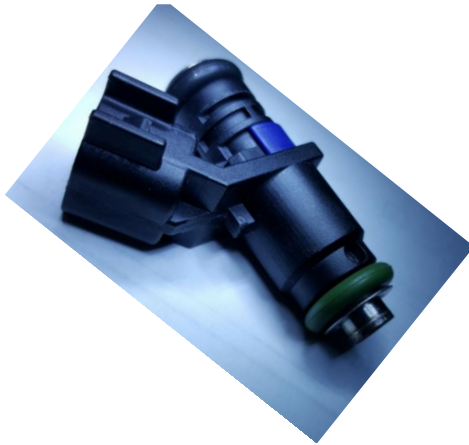


### Features



Fuel Compatibility	Standard Gasolines & Ethanol Flex Fuels
Fuel Pressure	350 kPa
Static Flow Rate	n-Heptane: 10.0 g/s (79 lb/hr, 875 cc/min), Gasoline (82 lb/hr, 845 cc/min)
Dynamic Flow Rate	n-Heptane: 21.7 mg/pulse (2.5 ms PW, 20 ms Period)
Offset	0.33
Minimum Linear PW	1.17 ms
Linear Flow Range (SAE)	12:3
Opening/Closing Time	1.08 ms, 0.69 ms
Coil Resistance	12.0 Ω
Injector Inductance	1.44 ± 0.09 mH
SMOV / DMOV	5.0V, 5.2V
Connector	USCar
Spray Pattern	10° Cone
Installation Compatibility	Deka VII Short Installation Compatible
Identification Clip Color	Purple

### Connector


### Basic Dimensions

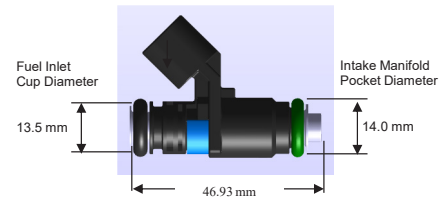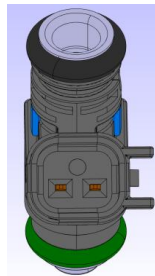

### Spray Characteristics (1 Hole Orifice)



### Voltage Sensitivity

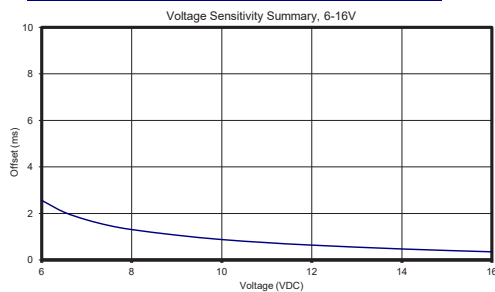

### Linearity

